

17", 19" Professional CCTV LCD Monitor (Plastic, 3D)

Features

- ▶ 17" / 19" CCTV TFT LCD Monitor
- ▶ Adaptive 3D Comb Filter / 3D De-interlace / Noise Reduction
- ▶ NTSC / PAL Auto Recognition
- ▶ PIP and POP Multi Display Function
- ▶ 6 Scanning Types: Over, Under, Full, 1:1, 4:3, 16:9
- ▶ 5ms Response, 1000:1
- ▶ S-Video and Two Composite Video Looping
- ▶ User Friendly Front Control and OSD Multi-language Support
- ▶ Anti-reflection Protection Glass (Optional)
- ▶ Mount Option: Wall and Rack



Specification

Model		17" Matrix Active TFT LCD	19" Matrix Active TFT LCD
LCD Display		17" Matrix Active TFT LCD	19" Matrix Active TFT LCD
Viewable Size		337.920mm (H) x 270.336mm (V)	376.32mm (H) x 301.06mm (V)
Pixel Pitch		0.264 (H) x 0.264 (V) mm	0.294 (H) x 0.294 (V) mm
Max. Resolution		500TVL / 1280 x 1024 (SXGA)	500TVL / 1280 x 1024 (SXGA)
Contrast Ratio		1000:1	1000:1
Brightness		300 cd/m ² (TYP.)	250 cd/m ² (TYP.)
Response Time Tr/Tf		5ms	5ms
Display color		16.7M	16.7M
Viewing Angle L/R		80° / 80° (CR=10)	80° / 80° (CR=10)
Viewing Angle U/D		80° / 80° (CR=10), 85° / 85° (CR=5)	80° / 80° (CR=10), 85° / 85° (CR=5)
Lamp Life Time		50,000 hrs	50,000 hrs
Scan Frequency	Horizontal	31.469KHz ~ 79.976KHz	31.469KHz ~ 79.976KHz
	Vertical	56.25Hz ~ 75.029Hz	56.25Hz ~ 75.029Hz
Scanning Type		Over, Under, Full, 1:1, 4:3, 16:9	
PIP & POP		Yes	
3D Comb Filter		Yes	
3D De-interlace		Yes	
OSD Language		English, Traditional Chinese, Simplified Chinese, French, German, Spanish, Italian	
Display Mode		VGA, Composite, S-Video	
Signal Connector	Input	BNC x 2, S-Video x 1, VGA (15 Pin D-Sub) x 1	
	Output	BNC x 2, S-Video x 1	
Audio Connector	Input	RCA Audio x 1	
	Output	RCA Audio x 1	
Audio Speaker		1W	
Cabinet Material / Color		Black / Plastic	
Power Input		DC 12V / 4A	
Power Supply		AC100V ~ 240V 50/60Hz	
Power Consumption		48W (Max.)	
Power Management		VESA DPMS Standard	
Operating Condition		Temperature: 0° ~ 40° Humidity: 20% ~ 80%	
Storage Condition		Temperature: -20° ~ 60° Humidity: 15% ~ 85%	
Net Weight		4.64kgs	5.54kgs
Gross Weight		6.64kgs	7.84kgs
Dimension (WxHxD)		385.89 x 406.75 x 240.0mm	424.19 x 437.35 x 240.0mm
Package Dimension (WxHxD)		TBC	
Safety		CE (EMC/LVD), FCC, UL, CUL, CB, CCC, BSMI	

Specification is subject to change without notice. 2010.01

Accessory



Wall Mount Kit

DW-170 (Three Knuckle Adjustment)
DW-171 (Two Knuckle Adjustment)




Rack Mount Kit


ERK-17 (for 17")
ERK-19 (for 19")

LCD Monitor

Function Panel

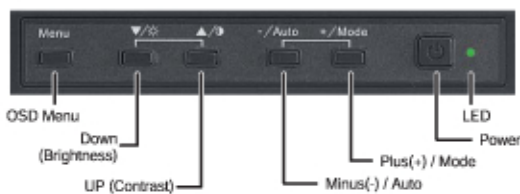

I/O Connectivity

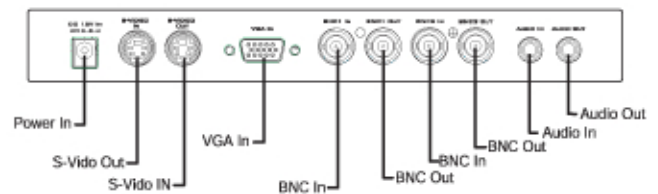

Dimension Unit:mm

